


AD 490

Doosan
Mecc Alte
D+ &



ISO8528	GC ,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC	&\$\$\$#(#
	z) \$' z' \$z 'D:

	"	"	"	"	Amp
400/230	485,00	388,00	425,00	340,00	613,00

fPQDE	GC ,) &				
fDF DE	%\$1	%	%&	GC " \$(**	z&(

Standard Specifications

z

fl ! E

z

z

fl

z

ALTERNATOR

D; A Ž 5J F

fl

z

fPQ \$\$\$ \$\$\$

TRANSFER SWITCH

fl

z

AD 490

Doosan
Mecc Alte
D+' &'

Manufacturer		Doosan		
Model		P158LE		
		% \$\$\$ "# "		
		(% \$\$\$ " Q)) \$\$\$< DQ		
	L	14,600		
	"	128 x 142		
		15,0:1		
	fl # 7	"# "	1500	
	fl 7	L	21,00	
		L	88,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	25,50		
	' # "	410,00		
	' # "	78,30		
	° C	580,00		
		24 V d.c.		
	Load	%\$\$i	'+)i)\$i
	# "	89,30	65,10	43,90


		Mecc Alte		
		ECO 40-2S/4		
	Hz	50		
	"	450,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	649,00		
Temperature		H		

		fl 7		fl 7	
	"	"	"	"	L
AD 490	3130,00	3026,00	1550,00	1994,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4150	4400	1560	2360	700

AD 490

Doosan
Mecc Alte
D+ &

1 D+ &

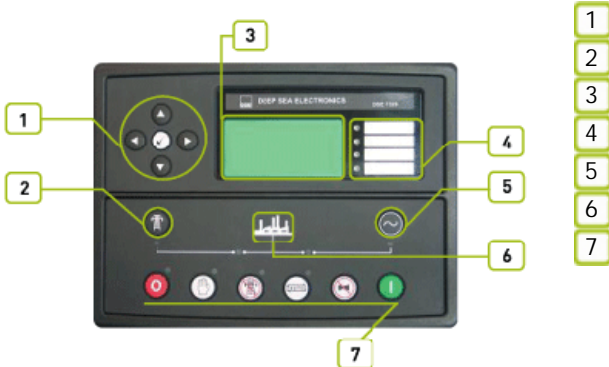

2

8G9ž + &\$ž) 5ž&&\$#(\$

3

4

5

8G9+ ' &\$
&&\$ ž
fi
" 8G9+ ' &\$
8G9+ ' &\$
ž
% &l * (
žFG& &žFG(,) ž

AD 490

Doosan
Mecc Alte
D+' &''

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

)
&(\$)

ž

ž

ž

ž

%, !&*(

"


"

"

"

AD 490

Doosan
Mecc Alte
D+ & "

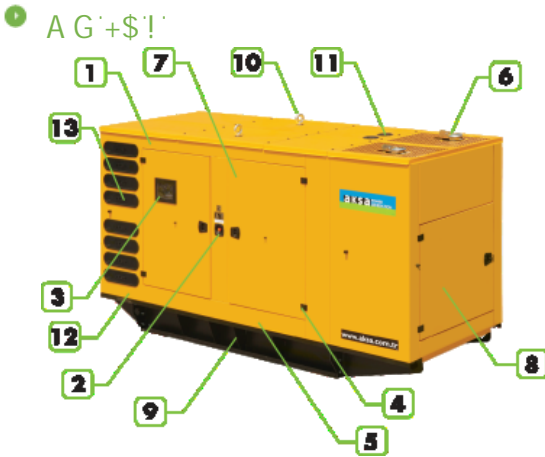

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	4400
fl "L	"	2360
	L	700